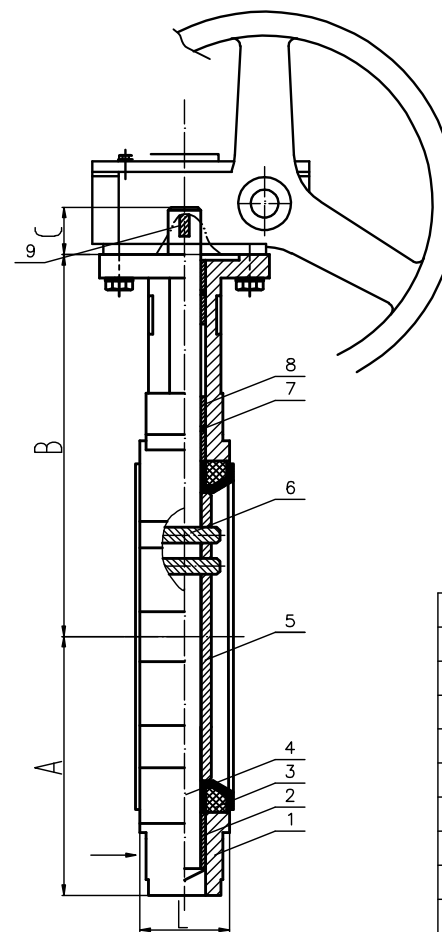
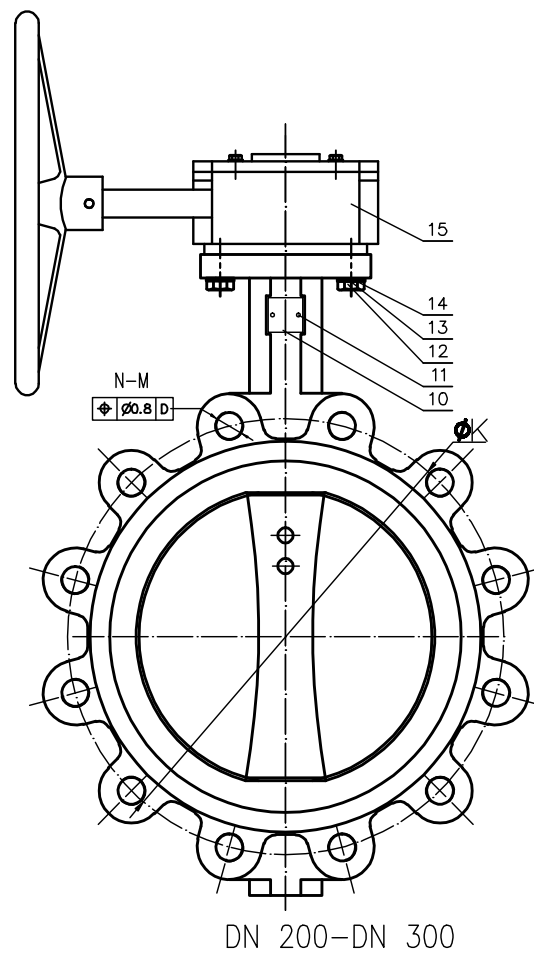
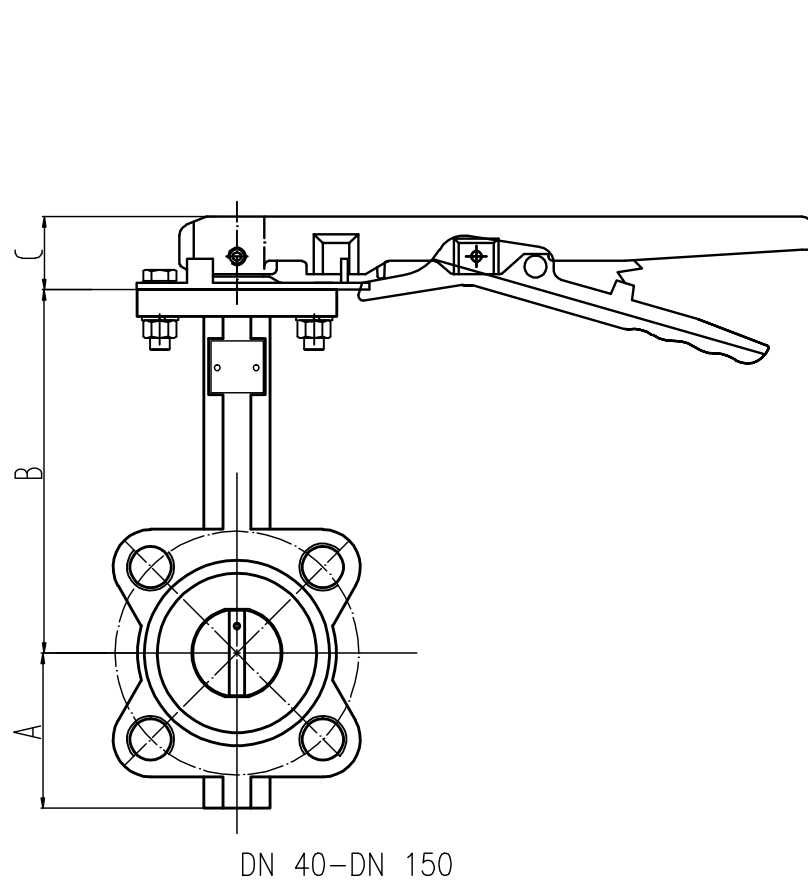


SIZE		A	B	C	L	ANSI 150B		DIN PN 10		DIN PN 16		JIS 10K		ISO 5211			Top Flange
mm	in					ØK	N-M	ØK	N-M	ØK	N-M	ØK	N-M	ØD	ØD1	N-φd	
40	1.5"	70	164	32	33	98.5	4-1/2"-13UNC-2B	110	4-M16	110	4-M16	105	4-M16	65	50	4-Ø8	F05
50	2"	80	169	32	43	120.6	4-5/8"-11UNC-2B	125	4-M16	125	4-M16	120	4-M16	65	50	4-Ø8	F05
65	2 1/2"	89	176	32	46	139.7	4-5/8"-11UNC-2B	145	4-M16	145	4-M16	140	4-M16	65	50	4-Ø8	F05
80	3"	95	183	32	46	152.4	4-5/8"-11UNC-2B	160	8-M16	160	8-M16	150	8-M16	65	50	4-Ø8	F05
100	4"	114	201	32	52	190.5	8-5/8"-11UNC-2B	180	8-M16	180	8-M16	175	8-M16	90	70	4-Ø10	F07
125	5"	127	214	32	56	215.9	8-3/4"-10UNC-2B	210	8-M16	210	8-M16	210	8-M20	90	70	4-Ø10	F07
150	6"	139	229	32	56	241.3	8-3/4"-10UNC-2B	240	8-M20	240	8-M20	240	8-M20	90	70	4-Ø10	F07
200	8"	175	257	45	60	298.4	8-3/4"-10UNC-2B	295	8-M20	295	12-M20	290	12-M20	125	102	4-Ø12	F10
250	10"	203	280	45	68	361.9	12-7/8"-9UNC-2B	350	12-M20	355	12-M24	355	12-M22	125	102	4-Ø12	F10
300	12"	242	327	45	78	431.8	12-7/8"-9UNC-2B	400	12-M20	410	12-M24	400	16-M22	125	102	4-Ø12	F10

15	Worm gear	cast iron	1	
14	Gasket	SS201	4	
13	Gasket	SS201	4	
12	bolts	SS201	4	
11	Studs	Al	2	
10	Metal label	SS416	1	
9	Key	45#	1	
8	bushing	PTFE	4	
7	O-ring	NBR	2	
6	pin	SS304	2	
5	disc	CF8	1	
4	stem	SS416	1	
3	seat	EPDM	1	
2	bushing	PTFE	1	
1	body	SS304	1	
NO	NAME	MATERIAL	QTY	

TEST PRESSURE		SHELL	SEAL
	HYDROSTATIC	24bar	17.6bar
	AIR		
ATAND-ARD	DESIGN CODE	JIS B2064\ DIN3354\ API609	
	INSPECTION&TEST	JIS B2003\ DIN3230\ API 598	
	END STANDARD	JIS B2212\ DIN2543\ ASME B16.5	
	FACE TO FACE	JIS B2002\ DIN3202\ API 609	

LUG BUTTERFLY VALVE					
APPROVED		DWG NO.			REV
CHECKED					
DRAWN		SCALE		UNINT	mm
DESIGNED					
Jinerjian(Tianjin)Valve Co.,Ltd.					