


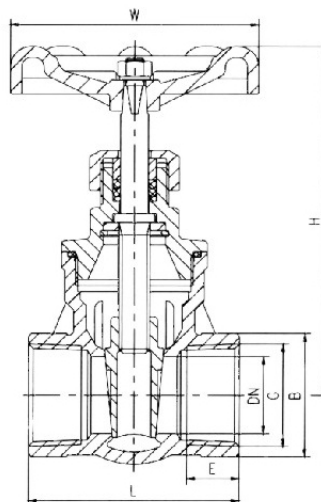

主要零件材质 Material Specifications

材料名称 Material Name	Z15H-(16-64)C	Z15H-(16-64)P	Z15H-(16-64)R
阀体 Body	WCB	ZG1Cr18Ni9Ti CF8	ZG1Cr18Ni12Mo2Ti CF8M
闸板 Disc	WCB	ZG1Cr18Ni9Ti CF8	ZG1Cr18Ni12Mo2Ti CF8M
阀杆 Stem	1Cr18Ni9Ti 304	1Cr18Ni9Ti 304	1Cr18Ni12Mo2Ti 316
密封 Sealing	304, 316		
填料 Gland Packing	聚四氟乙烯 Polytetrafluorethylene (PTFE)		

性能规范 Specifications

技术规范 Technical specification	
公称压力 Nominal pressure	PN1.6, 2.5, 4.0, 6.4MPa
强度试验压力 Strength testing pressure	PT2.4, 3.8, 6.0, 9.6MPa
高压密封试验压力 Seat testing pressure(high pressure)	1.8, 2.8, 4.4, 7.1MPa
适用介质 Applicable medium	Z15H-(16-64)C 水、油品、气 Water, Oil, Gas
适用温度 Suitable temperature	-29~180℃
适用介质 Applicable medium	Z15H-(16-64)P 硝酸类 Nitric acid Z15H-(16-64)R 醋酸类 Acetic acid

主要外形及连接尺寸 Main external and connecting dimensions(mm)

DN	G	L	E	B	H	W
15	1/2"	55	16	31	90	70
20	3/4"	60	18	38	98	70
25	1"	68	20	46	108	70
32	1 1/4"	76	21.5	56	128	80
40	1 1/2"	80	23	63	152	100
50	2"	93	24.5	76	166	100